

### 7948q Series Zero Clients

Model Numbers: 7948qv, 7948qc, 7948qm

### Industry Leading Endpoints & Management Software

The 10ZiG 7948q AIO Zero Client Series is truly an All-in-One with 5M webcam and dual digital microphone, 23.8" Full HD, frameless bezel design display with LED backlight panel, two external up-to-4K display monitor support, and more. Its impressive foot stand tilts from -5 to 20 degrees and swivels -65 to 65 degrees. Supportive of VMware, Citrix, Microsoft, Amazon WorkSpaces, and more. Equipped with free centralized management via The 10ZiG Manager™, which comes cloud-enabled with unlimited user licenses. Covered by technical support and software upgrades. Also available in a Thin Client device.




▶ Intel Quad Core 1.1 GHz (2.8GHz)
▶ AIO Monitor (1920 x 1080), 2 x External Monitors Support (1x 1920 x 1080 DVI-D & 1x 3840 x 2160 @360Hz DP)
▶ Up to 16GB DDR4 RAM for High Speed Support
▶ 2 x USB Port 3.2, 2 x USB Port 2.0, 1 x DP, 1 x DVI-D, 1 x 3.5mm Headset Jack
▶ RJ45 LAN
▶ TAA Compliant
▶ Optional Wireless (Dual External Antenna)
▶ Supports Kensington Lock
▶ FREE Centralized Management via 10ZiG Manager™

# 7948q Series Zero Clients



System	
Management	10ZiG Manager™
Processor	Intel Celeron Quad Core 1.1 GHz (2.8Ghz)
Processor Graphics	Intel HD Graphics for Intel® Celeron® Processor N3000 Series
Dimensions	
Device	539.5 (W) x 343.7 (H) x 48.2 (D) mm (w/o stand)
Weight	9.9 lbs. (4.5 kg.)
Connections	
Ports on Device	2 x USB Port 3.2, 2 x USB Port 2.0, 1 x DP, 1 x DVI-D, 1 x 3.5mm Headset Jack, 1 x Gbe LAN, 2 x Speaker
Video Resolution	AIO Monitor (1920 x 1080), 2 x External Monitors (1x 1920 x 1080 DVI-D & 1x 3840 x 2160 @360Hz DP)*
Networking	
Wireless	Optional (802.11 a/b/g/n/ac External Antenna)
Ethernet	10/100/1000 Base-T, RJ45 LAN
Environmental	
Operating Temp.	32-95 F (0-35 C)

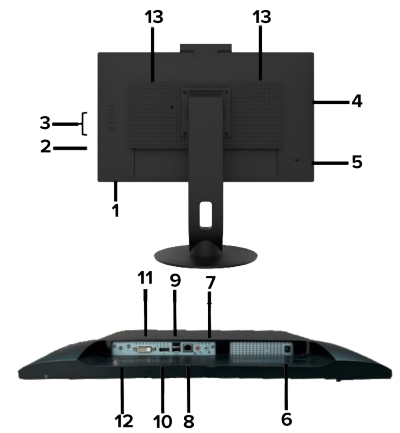

### SPECIFICATIONS

1. Power LED
2. Power Button
3. OSD Control Button
4. USB 3.0 x2
5. Kensington Lock
6. 19V DC Jack
7. Headset Jack
8. RJ45 LAN
9. USB 2.0 x2
10. DP
11. DVI-D
12. Antenna Hole
13. Speaker

	<u>VMware</u>	<u>Citrix</u>	<u>Microsoft</u>
	<b>7948qv</b>	<b>7948qc</b>	<b>7948qm</b>
<b>Operating System</b>	<b>NOS™ (Zero)</b>	<b>NOS™ (Zero)</b>	<b>NOS™ (Zero)</b>
Memory (RAM)	Std: 4GB Max: 16GB	Std: 4GB Max: 16GB	Std: 4GB Max: 16GB
Supported Protocols	Blast Extreme, PCoIP, RDP	Citrix ICA and EDT (HDX)	Azure Virtual Desktop, FreeRDP, Windows 365 Cloud PC
Connection Server	Horizon, Workspace One, Horizon Security Server, Unified Access Gateway, Windows 365 Cloud PC	Storefront, Netscaler, Citrix Cloud, Windows 365 Cloud PC	Direct RDP, RD Gateway, RD Load Balancer, RD Web, Azure Virtual Desktop, Windows 365 Cloud PC

\*Note: Actual display performance, such as multi-monitor and higher resolutions including 4K/UHD/QHD/WQHD are dependent upon your current VDI infrastructure and any additional requirements. Consult with 10ZiG for further guidance and model recommendation.



Americas P: +1 (866) 865-5250 E: info@10ZiG.com  
 EMEA P: +44 (0) 116 214 8650 E: info@10ZiG.eu  
 APAC P: +61 2 80027421 E: info@10ZiG.com.au  
 DE P: +49 (0) 6724 9304-45 E: vertrieb@10zig.de

W: www.10ZiG.com

